

Programmable POS Keyboard PKB-044/078 Series



TYSSO®

Insist on the Best



PKB-044



PKB-078

FEATURES

- Membrane key switches with tactile feeling
- 10 million strokes operating life cycles
- True keyboard wedge function: Key Code or ASCII Code
- Windows software programming without TSR program
- Magnetic stripe card reader available with various track combinations
- 6 positions key lock function
- Each key can be programmed up to 200 codes
- Up to 16 layers programming capability
- Non-volatile memory 10KB

SPECIFICATIONS

ISO-9002 Certified



Material
Interface

Physical

ABS



PS/2

Key Switch

Membrane

Membrane or
Mechanical (Option)

Dimension	234L x 144W x 45H mm	290L x 175W x 45H mm
Cable Length	2800mm	
Weight	0.68Kg	1.12Kg
Color	Black or white (Option)	
Travel Distance	4 0.5mm	
Operating Life Cycles	10 million strokes	
<i>Electrical</i>		
Power Supply	+5VDC 10%	
Interface	PS/2	
Current Input	< 100mA	
<i>Magstripe Card Reader (Option)</i>		
Card Density	Track 1: 210BPI with max. 76 characters	
	Track 2: 75BPI with max. 37 characters	
	Track 3: 210BPI with max. 107 characters	
	Track 1 or Track 2 or Track 3 or Dual Track (Track 1&2 or Track 2&3) or Three Track (Track 1&2&3)	
Magnetic Tracks		
Card Swipe Speed	10 to 100 cm/sec.	
Swipe Cycles	300,000 or 1,000,000 (Option)	
<i>Others</i>		
OS	Windows 98, ME, 2000, XP, Vista 32	
6 Position Key Lock & Keys	Option	Standard
Operating Temperature	0 ~+40	
Storage Temperature	-20 ~+55	
Operating Humidity	40%~90%	
DIMENSIONS		
	°C	°C
PKB-044	°C	PKB-078

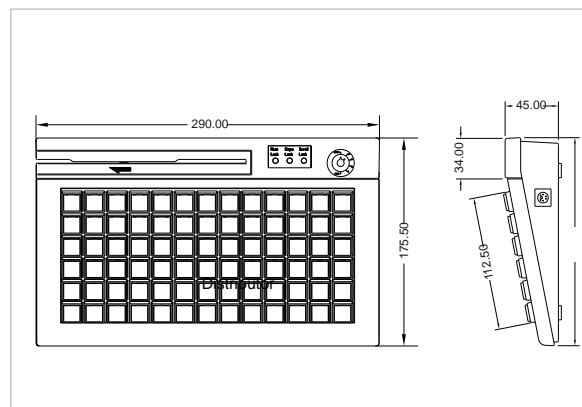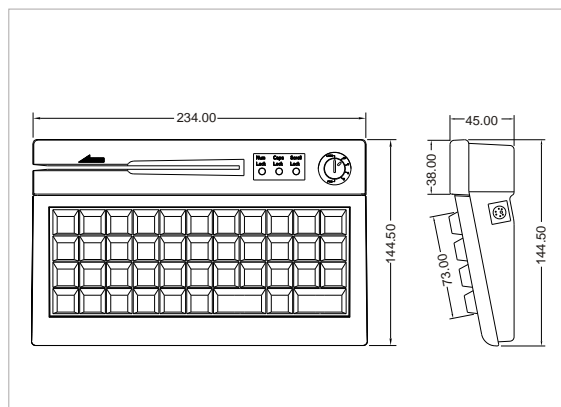

TYSSO®

Insist on the Best

Manufacturer

