

## POS Peripheral Dock PPD Series



# TYSSO®

Insist on the Best



## Appealing, Steady and Sturdy Dock

PPD Series, POS Peripheral Dock, a modular formation of LCD TFT monitor and customer display build on at the appealing, steady and sturdy dock which answers the emerging tendency of transforming regular PC to become POS machine due to cost or powerful PC performance point of concerns. The stylish, exquisite die-cast aluminum dock equips with three well-thought-out openings which allow peripheral cables travel tidily across dock. It also provides steady, no wobbling operation even the touch monitor in use. In addition, magnetic card reader or 40-key keypad integrated TFT LCD monitor are optional.

### FEATURES


- Modular formation
- 10.4", 12.1", and 15" LCD TFT monitors available
- VFD or LCD customer display selection
- Aluminum groundwork
- Untidy cables concealment



# SPECIFICATIONS

TFT LCD Monitor	10.4"	12.1"	15"
Viewing Area (mm)	211.2(H) x 158.4(V)	245.7(H) x 184.3(V)	304.1(H) x 228.1(V)
Number of Pixel	800(W) x 600(H)	1024(W) x 768(H)	1024(W) x 768(H)
Pixel Pitch (mm)	0.264(W) x 0.264(H)	0.240(W) x 0.240(H)	0.297(W) x 0.297(H)
Pixel Arrangement	R.G.B. vertical stripes		
Support Color	6-bit 262,144 colors		
Brightness	220 cd/m2	200 cd/m2	250 cd/m2
Contrast Ratio	400:1	200:1	400:1
Backlight	1 CCFL	1 CCFL	2 CCFL
Interface	VGA		
Touch Panel (option)	Resistive type 5 wire		
Power Adapter	110V to 22V switch power adapter		
Customer Display	VFD-450	DSP-420	DSP-430
Display Module	VFD	LCD	LCD
Number of Characters	20 x 2		
Display Pattern	5 x 7 dot matrix		
Character Size	6.4mm(W) x 9.2mm(H)	6.00mm(W) x 9.66mm(H)	6.00mm(W) x 13.95mm(H)
Display Color	Green	Yellow	Blue
Fonts	96 Alphanumeric & 13 international	English/European, English/Russian, English/Japanese	English/European, English/Russian, English/Japanese
Command Set	Plenty of command sets		
Interface	RS-232		
Power Adapter	110 or 220V power adapter		
Casing			
Material	Aluminum die casting		
Monitor Mounting Bracket	75mm x 75mm & 100mm x 100mm VESA compliance		
Tile Adjustment	3-70 degree		
Color	Black		
Weight	1.7KG		
Environment			
Operating Temperature	0°C to 45°C (32°F~113°F)		
Storage Temperature	-20°C to 60°C (-68°F~104°F)		

## DIMENSION: (For 15" LCD Monitor)

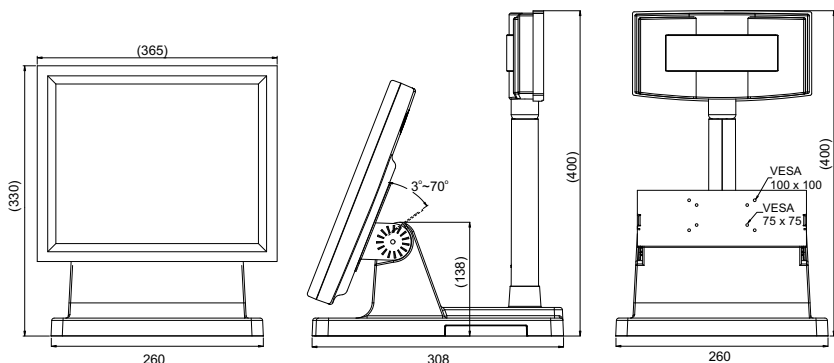

Specifications and dimensions are subject to change without prior notice.

## Model Number:

- PPD-□□-□□□□□□
- 0 w/o power adapter for display
  - 1 with 110V power adapter
  - 2 with 220V power adapter
  - 00 w/o display
  - 45 with VFD-450
  - 42 with DSP-420
  - 43 with DSP-430
  - 0 w/o Touch panel
  - R with touch panel RS-232
  - U with touch panel USB
  - 0 w/o power adapter for LCD monitor
  - 1 with 110V power adapter
  - 2 with 220V power adapter
  - 00 w/o LCD monitor
  - 10 with 10.4" LCD monitor
  - 12 with 12.1" LCD monitor
  - 15 with 15" LCD monitor



**TYSSO**<sup>®</sup>  
Insist on the Best

Made in Taiwan

Distributor