

# RS-485 Proximity Reader (125KHz)




## Ordering Information

Package Content : 1pc/inner box


- Reader x1
- Plate or Base x1
- Quick Start Guide x1
- Accessory Pack x1

### Model No. Identification

**P X R - 5 2 E S K**

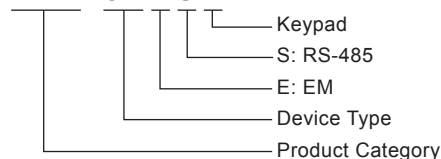

### Color

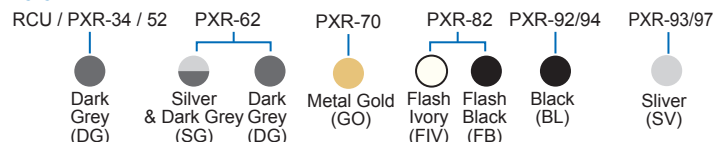

## Specifications

Model No.	RCU-ESK	PXR-34ESK	PXR-52ES(K)	PXR-62ES	PXR-70ES	PXR-82ES(K)	PXR-92 / 93 ES(K)	PXR-94 / 97ESK
Read Format	125 KHz (EM Compatible)							
Read Range	6~8 cm (max.)		8-10 cm (max.)	8-10 cm (max.)	2 cm (max.)	8-10 cm (max.)		
Keypad (ESK)	16 Key ( F1-F4, 0-9, CE, Enter )		12 Key ( 0-9, CE, Enter )	NONE		12 Key (0-9, *, # )		16 Key (F1-F4, 0-9, *, # )
Input Ports	Case Sensor x 1							
LCD Display	Power / Comm.							
LED Indicator	128 x 64 (RCU), 122 x 32 (PXR-34) Dot. Graphic Display with backlight			NONE				128 x 64 Dot. Graphic Display with backlight
Beep Tone	Buzzer							
ID Setting	DIP switch setting							Command setting by keypad
Power Input	DC 12V / 1A							
Current Consumption	300mA (max)		200mA (max)				500mA (max)	
Comm. Interface	RS-485							
Comm. Baudrate	19,200 bps-N-8-1							
Operating Temp.	0°C ~ 55°C / 32°F ~ 131°F			-10°C ~ 70°C / 14°F ~ 158°F				0°C ~ 55°C / 32°F ~ 131°F
Relative Humidity	20% ~ 80%(Non-condensing)							
Dimension(LxWxH)(mm)	209 x 116 x 37	140 x 65 x 25	120 x 76 x 23	120 x 76 x 27	146 x 42 x 24	140 x 77 x 23	120 x 77 x 22	130 x 100 x 27
Weight(Device)	590g	130g	102g / 120g(K)	90g	130g	96g / 107g(K)	92:104g /120g(k) 93:104g /122g(K)	94:198g 97:188g

\* Product design and specifications are subject to change without prior notice.