

# T2 / Wiegand Proximity Reader (125KHz)




## Ordering Information

Package Content : 1pc/inner box


- Reader x1
- Plate or Base x1
- Quick Start Guide x1
- Accessory Pack x1

### Model No. Identification

**PXR-52ETK**

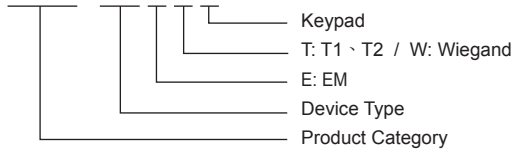

### Color

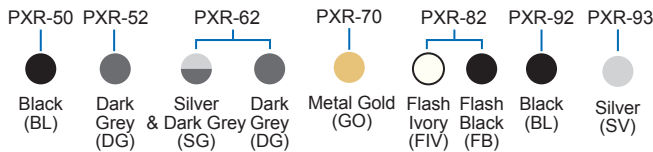

## Features

- Reliable & easy installation.
- Reader tamper proof detection function.
- Watchdog function secures system free from halting.
- Base on different demands, customs have different selection.
- Slim, stylish design, sensitive touch keypad with blue backlight suit for various locations. (PXR-92/93)
- Metal housing, strong protection. (PXR-70)

## Specifications

Model No.	PXR-50ET/EW	PXR-52ET/EW (K)	PXR-62ET/EW	PXR-70ET/EW	PXR-82ET/EW (K)	PXR-92ET/EW (K) PXR-93ET/EW (K)
Read Format	125 KHz (EM Compatible)					
Read Range	6-8cm (max.)	8-10cm (max.)	8~10cm (max.)	2cm (max.)	8~10cm (max.)	
Keypad(ETK/EWK)	NONE	12 Key (0-9, CE, Enter)	NONE		12 Key (0-9, *, #)	
Input Ports	NONE	Case Sensor x 1 , LED Indicator control x 2 , Buzzer control x1				
LED Indicator	Power / Comm.					
Beep Tone	Buzzer					
Power Input	DC 12V / 1A					
Current Consumption	200mA (max)					
Comm. Interface	T1 / T2 / Wiegand					
Operating Temp.	-10°C~ 70°C / 14°F~ 158°F					
Relative Humidity	20% ~ 80%(Non-condensing)					
Dimension (LxWxH)(mm)	95 x 44 x 16	120 x 76 x 23	120 x 76 x 27	146 x 42 x 24	140 x 77 x 23	120 x 77 x 22
Weight(Device)	77g	102g / 120g (K)	90g	130g	96g / 107g (K)	92: 104g / 120g (K) 93: 104g / 122g (K)