

Product profile

SG20

General Duty Imager



The Intermec SG20 is an affordable, high performance handheld scanner available in a range of models suited to the demands of general purpose countertop scanning.

- Features the industry's fastest 2D imaging technology for highly responsive, dependable scanning
- Unique, ergonomic styling maximizes comfort and saves countertop space
- Large LED indicator provides effective visual operational feedback
- Bluetooth® wireless or tethered (cabled) connectivity
- Choice of imaging options matched to your scanning needs—1D or high performance 2D scan engines
- Wide range of multi-purpose accessories increase scanner flexibility
- Integrates seamlessly with point of sale systems, personal computers, and common software solutions

Best-in-class motion tolerance for the fastest scans

Improving customer satisfaction has long been the mission of retailers everywhere, and making the checkout process more efficient is a key area of focus. By providing highly responsive and accurate scanning at checkout, the Intermec SG20 handheld bar code scanner helps you improve the customer experience.

Reliable, Responsive Scanning

The checkout process is all about speed and efficiency. The SG20HP features the industry's fastest bar code reading technology, providing more than 50 times the motion tolerance of typical scanners. This ensures that all common 1D and 2D bar codes are scanned easily and consistently so you can serve your customers quicker.

Unlike laser scanners, the SG20HP supports true omnidirectional scanning of both 1D and 2D bar codes. When combined with best-in-class motion tolerance, this capability means your bar codes can be scanned at record speeds, at any orientation. Now, you don't have to waste time repositioning awkward items to get a successful scan.

Perfectly Matched to Your Needs

Intermec understands that a "one-size-fits-all" approach to scanning can limit user efficiency and accuracy, so the SG20 family includes a range of models with different communication and scanning capabilities. Bluetooth® wireless connectivity.

Select between Bluetooth wireless for up to 10 meters (32.8 feet) of range, or the simplicity of tethered (cabled) connectivity. Choose the scan engine matched to your needs: either 1D-only or high performance 1D/2D scanning. Now, you can standardize on a single scanner family across your operation while providing employees with just the right capabilities they need for their specific tasks.

A variety of matching accessories, such as scan stands and holders, enable hands-free scanning and free up counter or desktop space. Regardless of the configuration, the entire SG20 line is priced for affordability and value.

Setting a New Design Standard

The stylish design of the SG20 sets it apart from traditional gun-shaped handheld scanners. Careful attention to detail and extensive usability testing have resulted in a scanner that is not only aesthetically pleasing on any countertop, but also optimized for user comfort with a natural smooth grip and trigger location.

The arching profile of the SG20 is perfect for tight spaces and the over-sized multi-color LED provides a bright visual cue to confirm a successful scan, which can be helpful in noisy environments. In fact, the LED can be programmed to match the decor of your storefront.

Part of a Complete Intermec Solution

The SG20 can be quickly and easily configured with Intermec's exclusive EasySet™ PC programming tool. In just a few clicks, this Windows-based utility can print programming barcodes for custom configurations. Adjust security settings, symbologies, beeper tone and volume. LED color—even set up advanced data editing routines.

Comprehensive Support Services Available

Intermec bar code scanners operate in dynamic business environments, and a support plan can protect you from unforeseen contingencies. Intermec Medallion® Service programs deliver the highest levels of productivity, device reliability, and uptime. Choose the right amount of coverage appropriate for your operations. For more, visit www.intermec.com/services.

Physical Characteristics

Dimension (L x W x H):

20 cm (7.9 in) x 6.1 cm (2.4 in) x 6.5 cm (2.6 in)

Weight (SG20T): 125 g (4.41 oz)

Weight (SG20B): 175 g (6.17 oz)

Electrical Specifications

Battery: Lithium-ion rechargeable (1567 mAh)

Battery Life: Minimum 8K scans from 70% capacity

Battery Recharge Cycle: 3 hrs when connected to external power supply; 6 hrs when slow charged from typical USB port

Typical Power Consumption

Corded Versions @5V DC:

120mA (SG20T1D); 330mA (SG20THP)

Cordless Versions (Base Station): 0.5A maximum

Bluetooth Radio

Type: Bluetooth Class 2 v2.1+EDR

Range: 10 m (32.8 ft)

Features: Adaptive Frequency Hopping (AFH)

Connectivity

- USB: HID keyboard, HID POS*, IBM SurePOS*, virtual comm port
- PC keyboard wedge
- RS232

* Tethered (corded) versions

Asia Pacific Headquarters Office Singapore

Intermec Technologies (S) Pte Ltd
151, Lorong Chuan,
#05-02A/03 (Lobby C),
New Tech Park,
Singapore 556741
Tel : +65 6303 2100
Fax: +65 6303 2199
www.intermec.com.sg

Malaysia

Suite L-8-11, Level-8, Wisma BU8,
No 11, Lebuhr Bandar Utama, PJU 6,
Petaling Jaya, 47800, Selangor,
Malaysia
Tel : +603 7726 8730
Fax: +603 7727 8731

Thailand

Two Pacific Place, Unit 1105,
142 Sukhumvit Road,
Klongtoey, Bangkok 10110,
Thailand
Tel : +662 653 2750
Fax: +662 653 2751

Scan Technology

SG20xHP: Intermec Area Imager (EA30)

SG20x1D: Intermec Linear Imager (EV technology)

Bar Code Symbologies for 1D Model (SG20x1D)

Codabar, Code 11, Code 39, Code 93/93i, Code 128 / GS1-128, EAN/UPC, GS1 DataBar Limited, GS1 Composite (linear only), GS1 DataBar Expanded, GS1 DataBar Omnidirectional, Interleaved 2 of 5, Matrix 2 of 5, MSI, Plessey, Standard 2 of 5, Telepen

Bar Code Symbologies for 2D Models (SG20xHP)

All above symbologies supported by 1D model plus the following: Australian Post, Aztec, BPO, Canada Post, Codablock A, Codablock F, DataMatrix, Dutch Post, EAN/UPC, GS1 Composite, GS1 DataBar Stacked, Infomail, Intelligent Mail, Japan Post, Maxicode, Micro PDF417, Multicode, PDF417, Planet, Postnet, QR Code, Sweden Post, TLC 39

Temperature and Environmental Specifications

Operating temperature: 0°C to 50°C (32°F to 122°F)

Storage temperature: -20°C to 60°C (-4°F to 140°F)

Relative humidity: 5 to 95% non-condensing

Drop: 1.2 m (4 ft.) to concrete

Environmental rating: IP30

Ambient light: 0 to 100,000 lux

Electromagnetic Emissions Standards

Meets the requirements of the following product emission standards:

- FCC Part 15 Class B (United States)
- Industry Canada ICES-003 Class B (Canada)
- EN 55022: CISPR 22 Class B (European Union)

Environmental Compliance Requirements

Conforms to environmental compliance requirements for RoHS, China RoHS, WEEE, and REACH.

Regulatory Approvals

UL; CE Mark (EU); NOM (Mexico); C-TICK (Australia and New Zealand); CQC and SRRS (China); IDA (Singapore); ANATEL (Brazil); Industry Canada ICES-003 Class B (Canada)

Standard Warranty

- **Tethered Models (SG20T):** 5 years
- **Bluetooth Models (SG20B):** 3 years
- Extended protection available with Intermec Medallion Support

Accessories

Consult the SG20 Accessory Guide for details.

- Adjustable hands free desktop scan stand
- Desktop/wall mount holder
- Charge base (for cordless versions)
- Bluetooth charge base (for cordless versions)
- USB, RS232, keyboard wedge interface cables
- Easyset™ configuration software

Australia

Intermec Technologies Australia Pty. Ltd.
Level 4, 1-3 Atchison Street,
St. Leonards,
NSW 2065,
Australia
Tel : +61 2 9330 4400
Fax: +61 2 9437 0240
www.intermec.com.au

Korea

Hong-Eun B/D Room 902,
824-22, Yeoksam-dong, Gangnam-gu,
Seoul 135-934, Korea
Tel : +82 2 552 2484
Fax: +82 2 552 2483
www.intermec.co.kr

Hong Kong


Rm 3601 11/F, AXA Centre,
151 Gloucester Road,
Wanchai,
Hong Kong
Tel : 852.3752 1906
Fax: 852.3013 9401

Typical Reading Distances*

SG20xHP


Min. X dimension 1D: 4 mils (0.1 mm)

Min. X dimension 2D: 6.6 mils (0.17 mm)

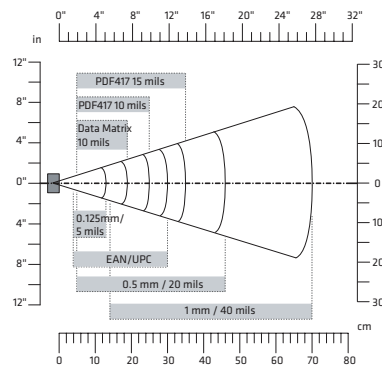

SG20x1D

Minimum X dimension: 6 mils (0.15 mm)

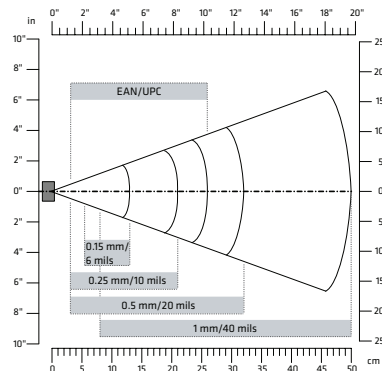

* The reading distances given are typical reading distances measured in an office environment (200 lux)



China

Beijing

1510A, 15th floor, South Tower,
Raycom Infotech Park C,
No.2 Science Institute South Road,
Beijing, 100190,
P.R. China
Tel : +86 10 5165 5922
Fax: +86 10 6583 4408

Shanghai

Unit B3, Floor 28, JuneYao International Plaza,
No.789 Zhaoliangbang Rd,
Shanghai, 200032,
P.R. China
Tel : +86 21.6278 1090
Fax: +86 21.6278 1081

Shenzhen

Unit 1308, International Chamber of Commerce
Tower, Fu Hua Third Road, Fu Tian Central District,
Shenzhen 518048,
P.R. China
Tel : +86 755.8831 2391
Fax: +86 755.8831 2396

China Toll Free: 400 6100 277
www.intermec.com.cn

Copyright © 2012 Intermec Technologies Corporation. All rights reserved. Intermec is a registered trademark of Intermec Technologies Corporation. All other trademarks are the property of their respective owners.
Printed by MG Digital Pte Ltd (Corp-051 03/12).

In a continuing effort to improve our products, Intermec Technologies (S) Pte Ltd reserves the right to change specifications and features without prior notice.

