


tattoo

the thermal transfer card printer

The monochrome
plastic card printer

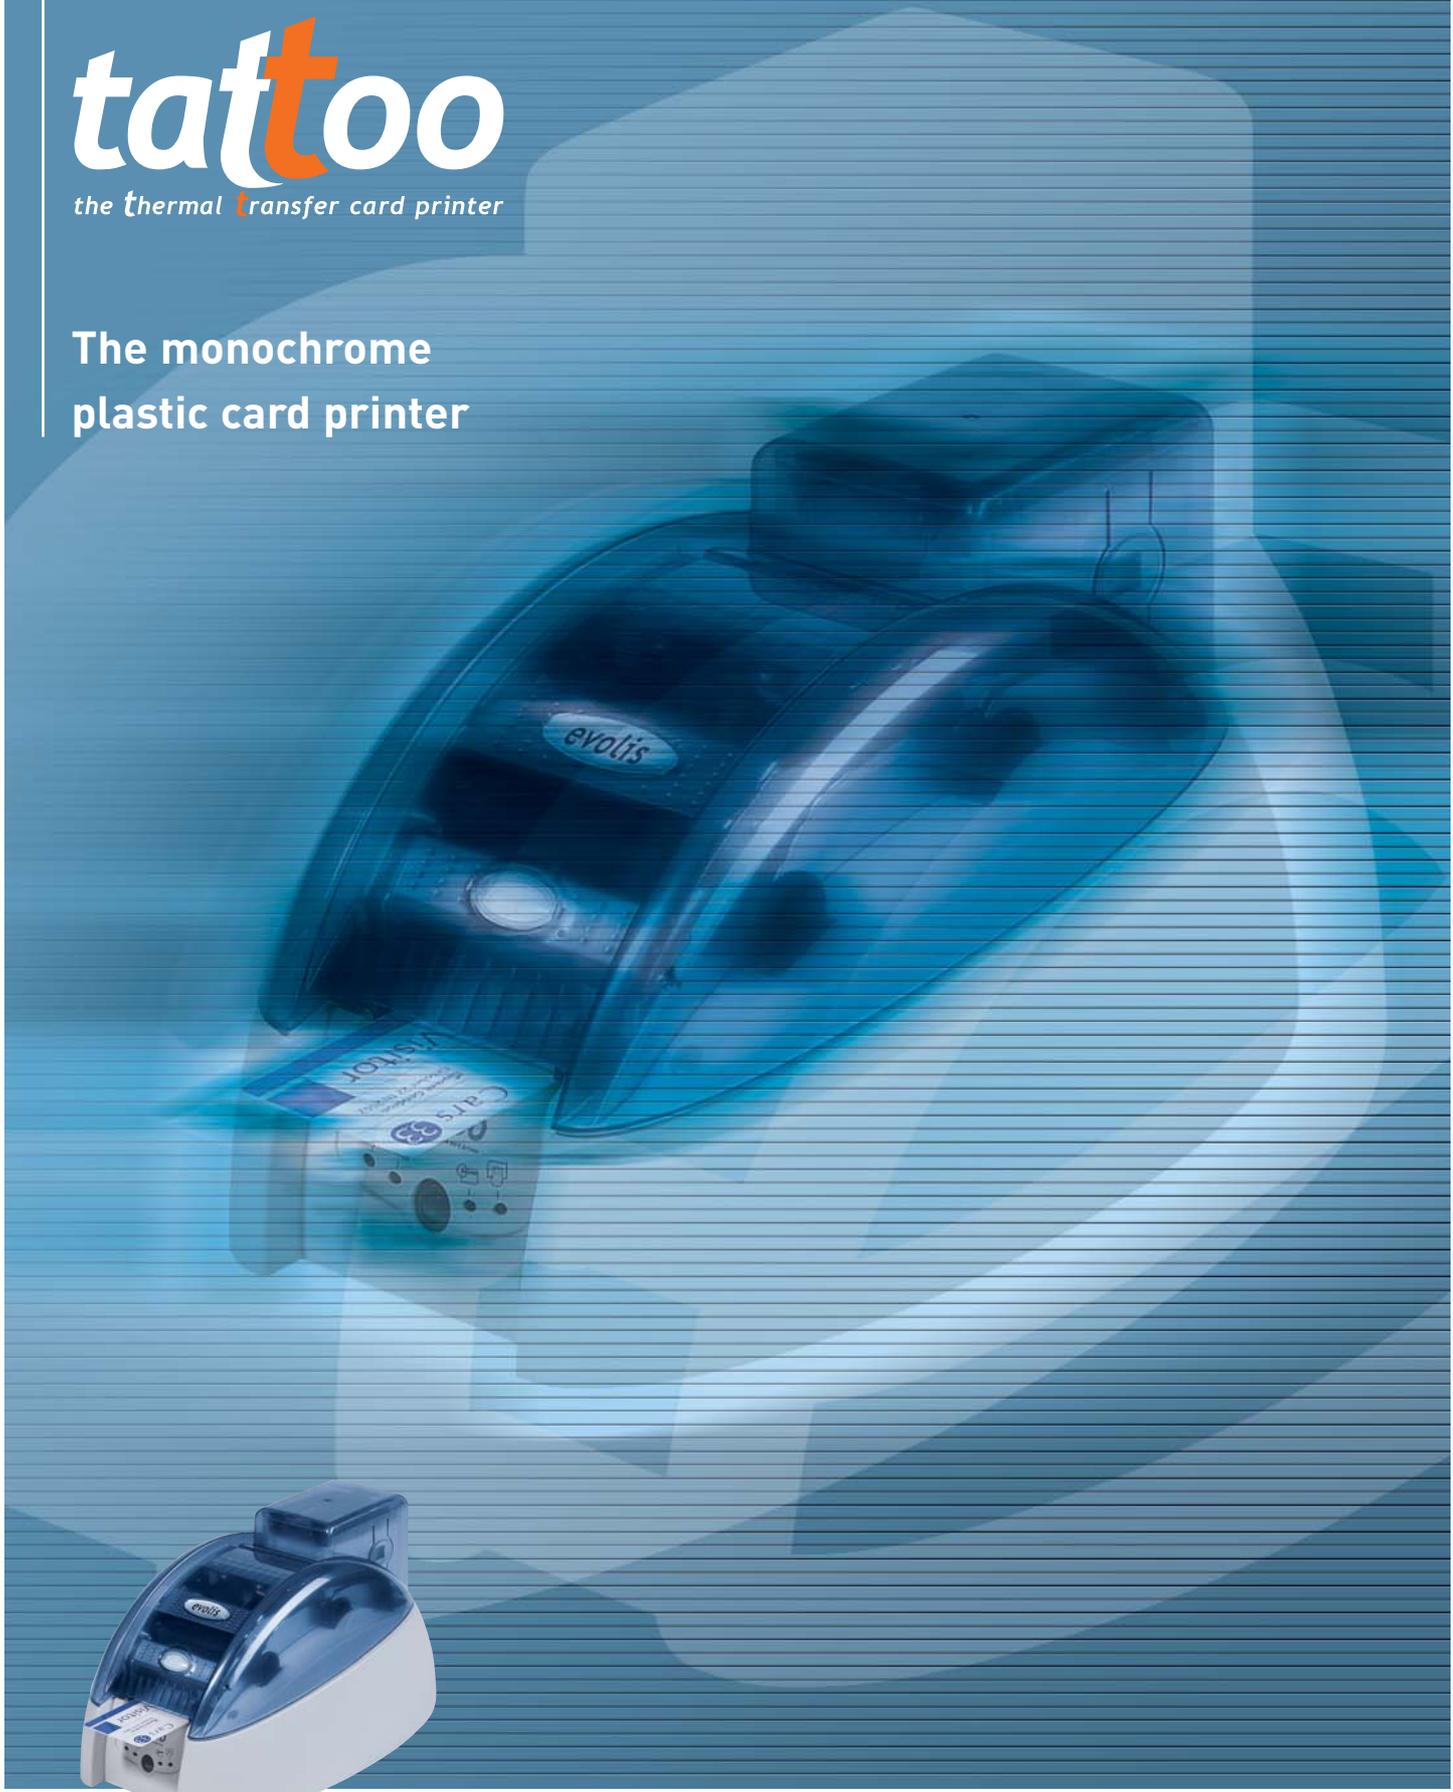

Monochrome Thermal
Transfer

300 dpi

Single-Sided

7 s/card

100 cards

0.25-0.76 mm
(10-30 mil)

evolIS

www.evolis.com



Hi-Tech design, compactness and ease of use, the **Tattoo** revolutionizes the world of monochrome printing on plastic cards.

In a few seconds, the **Tattoo** personalizes your pre-printed or blank plastic cards. It prints your high resolution texts, barcodes, graphics and logos.

Representing the ideal for visitor badges, loyalty cards, subscription cards, and much more, the **Tattoo** can be integrated in all types of environment: offices, bank receptions, shop counters. The **Tattoo** is today the most compact of all plastic card printers.

A mixture of technology and innovation, the **Tattoo** offers a double loading mode: card by card manual feeding (card introduced at the front) and automatic feeding thanks to its 100 card feeder. This detachable and completely enclosed feeder makes it possible to prepare several series of cards and to guarantee an optimal printing quality.

Tattoo, the small revolution!



Print mode

- Monochrome thermal transfer
- Line mode for text, barcode, graphic and logo printing or diffusion mode for photo printing

Printer specifications

- Integrated ribbon saver for monochrome printing
- Automatic card thickness adjustment

Print speed

- 500 cards/hour

Resolution

- 300 dpi (11.8 dots/mm)

Windows™ drivers

- For Windows™ 95, 98, Me, NT 4.0, 2000 and Xp

Warranty

- Printer: 1 year
- Print head: 1 year, unlimited number of prints¹

Ribbon types

- Black, blue, red and green monochrome ribbons: 600 cards/roll
- White, gold, silver and scratch-off monochrome ribbons: 500 cards/roll
- BlackWAX monochrome ribbon (for ABS, special varnished plastic cards and paper cards): 600 cards/roll

Card loading modes

- Automatic with feeder and/or hand-feed

Options

- Serial port (available upon study)
- 100-card additional feeder
- Backpack for demonstration
- Cleaning kit

Other printer model

- **Tattoo Mag**
Printer with HICO / LOCO magnetic stripe encoder - ISO 7811

1 - Clause governing the use of Evolis ribbons

Card types	PVC, Composite PVC, PET, ABS, special varnished plastic cards and paper cards
Card format	ISO CR-80 - ISO 7810 (53.98 mm x 85.60 mm - 3.375" x 2.125") Maximum print area: 52 mm x 83 mm (2.04" x 3.26")
Card thickness	From 0.25 mm (10 mil) to 0.76 mm (30 mil)
Card feeder capacity	300 cards (0.25 mm - 10 mil) - 100 cards (0.76 mm - 30 mil)
Resident barcodes	Code 39, Code 2/5 interleaved
Resident fonts	Arial normal 100, Arial bold 100
Printer size	Height: 166 mm (6.53") - Width: 290 mm (11.42") - Depth: 187 mm (7.36")
Printer weight	2,5 Kg (5.5 lbs)
Connections	USB and Centronics parallel ports (cables supplied)
Electrical	110-230 Volts CA, 60-50 Hertz
Environmental	<ul style="list-style-type: none"> ■ Min / max operating temperatures: 15° / 30° C (59° / 86° F) ■ Humidity: 20% to 65% non-condensing ■ Min / max storage temperatures: -5° / +70° C (23° / 158° F) ■ Storage humidity: 20% to 70% non-condensing ■ Operating ventilation: free air

Headquarters:
Evolis Card Printer

29, Avenue de la Fontaine · Z.I. Angers-Beaucouzé · 49070 Beaucouzé · France
Tel: + 33 (0) 241 367 606 · Fax: +33 (0) 241 367 612 · info@evolis.com

Branch office for the Americas:
Evolis Inc.

1835 South Perimeter Road · Suite 190 · Fort Lauderdale · FL 33309 · USA
Tel: (954) 491-9898 · Fax: (954) 491-5140 · evolisinca@evolis.com

www.evolis.com