

GS AB2000

Wearable Smart Armband (battery without)

The GS AB2000 smart wearable armband allows workers to use the ring barcode scanner to obtain barcodes while emptying their hands and eyes to focus on handling the cargo. You can sort, sort, label, weigh and transport. Using comfortable and breathable sports materials will make you feel more comfortable in a hot environment than ever before.

It applies to all Bluetooth barcode scanners, especially for Generalscan Bluetooth ring barcode scanners. The GS AB2000's ergonomic hands-free wear-resistant design, as well as a patented rotating platform design, plus a weight of just 83g, will make your operation easier. From then on, you'll be free from the PDA of outdated, clunky Win CE and Win Mobile systems.



Feature

- Designed for sorting and other applications
- Can be connected with all bluetooth barcode scanners
- With a patented 360° rotating base
- 3100mAh built-in high-capacity rechargeable battery
- Ergonomic design, comfortable and breathable materials
- Compatible with iOS、Android、Windows

Application Scenarios



GS AB2000

Wearable Smart Armband (battery without)


PHYSICAL CHARACTERISTICS

Dimensions	128 mm(L) × 79.1 mm(W) × 44.8 mm(H) 5.0 in.(L) × 3.1 in.(W) × 1.8 in.(H)
Weight	170 g / 6.0 oz.
Bandages Dimensions	296.5 mm(L) × 39.1 mm(W) × 1.6 mm(H) 11.7 in.(L) × 1.5 in.(W) × 0.06 in.(H)
Bandages Weight	11 g / 0.39 oz.
Compatible Scanner	R series, M series

ENVIRONMENT CHARACTERISTICS

Operating Temperature	5°F to + 131°F / -15°C to 55°C
Storage Temperature	-22°F to +149°F / -30°C to +65°C
Humidity	5% to 95% non-condensing
Drop Rating	In protective case, multiple 5.9 ft./ 1.8 m drops to concrete over the operating temperature range
Certification	CE , FCC , RoHS

THREE-VIEW DRAWING

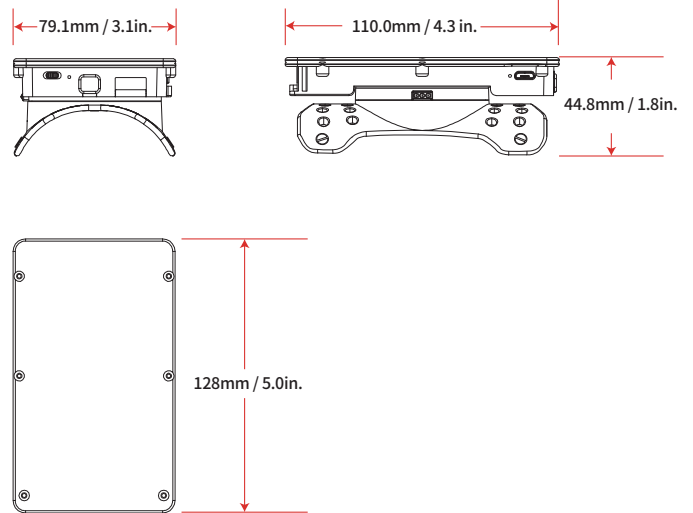

Generalscan Inc.

Add:200 Buckelew Ave, Jamesburg, NJ

Postcode: 08831

Tel: +1 1469583-7367

Note: This data is derived from laboratory measurements.
Due to changes in the objective environment and temperature differences, the data will vary or be errors.