

AR4D1

PREMIUM WAX-RESIN RIBBON



Quality starts with OUR film

Ribbon Specifications

Recommended Substrates:

- Coated and uncoated thermal transfer papers
- Tags
- Gloss and semi-gloss papers
- Synthetic films
- PE, PP, PVC

Storage Conditions:

- Use within 12 months recommended
- Keep away from UV and direct sunlight
- Temperature 5-35°C (40-95°F)
- Humidity 20-80%


Applications



RIBBON PROPERTIES

TOTAL THICKNESS	7.1 ± 0.3µm
INK THICKNESS	2.5 ± 0.4µm
GLOSSINESS	≤ 60 Gs
ELECTROSTATIC	≤ 0.06 Kv
OPTICAL DENSITY	≥ 2.15 D
INK MELT POINT	78° C

PRINTING CHARACTERISTICS

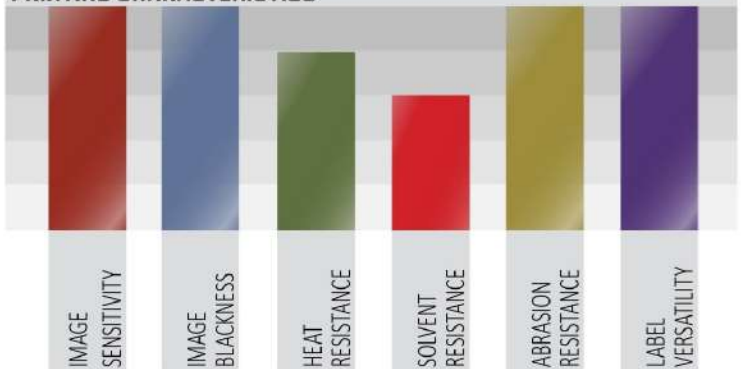

PROVEN CONSISTENCY AND QUALITY

