B110A

(For Flat Head Printers)

Thermal Transfer Ribbon Product Information

WAX-RESIN SMEARLESS

RIBBON PROPERTY

- Base Material
- Base Thickness (µm)

INK PROPERTY

- Ink Color
 - Ink Transparency

PRINTING PROPERTY

- Image Density (check w/ X-Rite)
- ANSI Grade

IMAGE PROPERTY

- Scratch Resistance (Times)
- Light Resistance
- Water Resistance

RICOH imagine. change.

Last update: Aug. 2016 Ref: PS-1698 (Rev. 1)

> Polyester film 4.5 ± 0.4

> > Black Min. 1.2


Min. 1.25 Min. Vertical Bar ANSI 2.0 C

> Min. 100 Min. ANSI 2.0 C Min. ANSI 2.0 C

* All tests specifications are based on Ricoh's standard test methods.

USAGE ENVIRONMENT: 5 ~ 35°C (41 ~ 95°F), 30 ~ 85%RH STORAGE CONDITIONS: Keep indoors, away from high temperatures, high humidity and direct sunlight. Keep master rolls hanging horizontally. **GUARANTEE PERIOD:** 2 years after manufacturing. FEATURES: Reliable, sharp-edge print quality All purpose wax/resin TTR

- · Prints on wide variety of media
- High resistance to smearing & chemicals
- Maximizes barcode scanning rates
- Minimizes static electricity & ink flaking problems

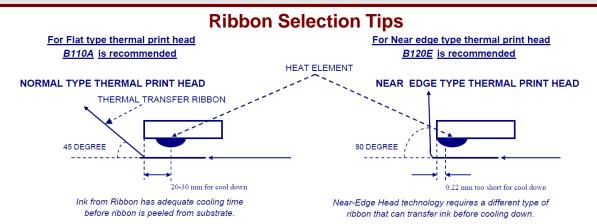

The above data represents product averages, allowing for industry accepted variances. These products should be tested in the enduse conditions to ensure that they meet the requirements of the specific application. Specifications may change without notice. RICOH ELECTRONICS, INC. DISCLAIMS ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE IN CONNECTION WITH THE CUSTOMER'S PURCHASE OF OUR PRODUCTS. IT IS CUSTOMER'S SOLE AND EXCLUSIVE RESPONSIBILITY TO TEST AND ENSURE SUITABILITY OF OUR PRODUCTS FOR ITS CUSTOMERS' OR END-USER'S APPLICATION.

Ricoh Electronics, Inc. • 1125 Hurricane Shoals Road • Lawrenceville, GA 30043 • www.RicohThermalProducts.com Customer Service: 1.800.843.7058 • Toll Free FAX: 1.888.843.7059 • email: orders@rei.ricoh.com