

DS-7604NXI-K1(标配)/印度制造SKD  
4-ch 1U K Series AcuSense 4K NVR



- Up to 4-ch IP camera inputs
- H.265+/H.265/H.264+/H.264 video formats
- Up to 1-ch@12 MP or 2-ch@8 MP or 4-ch@4 MP or 8-ch@1080p decoding capacity
- Up to 40 Mbps incoming bandwidth
- Adopt Hikvision Acusense technology to minimize manual effort and security costs

## ▪ Specification

Model		DS-7604NXI-K1(标配)/印度制造SKD
Intelligent Analytics	AI by Device	Facial recognition, perimeter protection, motion detection 2.0
	AI by Camera	Facial recognition, perimeter protection, throwing objects from building, motion detection2.0, ANPR, VCA
Facial Recognition	Face Attributes	N/A
	Facial Detection and Analytics	Face picture comparison, human face capture, face picture search
	Face Picture Library	Up to 16 face picture libraries, with up to 20,000 face pictures in total (each picture ≤ 4 MB, total capacity ≤ 1 GB)
	Facial Detection and Analytics Performance	1-ch, 8 MP
	Face Picture Comparison	2-ch
Motion Detection 2.0	By Device	All channels, 4 MP (when enhanced SVC mode is enabled, up to 8 MP) video analysis for human and vehicle recognition to reduce falsealarm
	By Camera	All channels
Perimeter Protection	By Device	1-ch, 4 MP (HD network camera, H.264/H.265) video analysis for human and vehicle recognition to reduce falsealarm
	By Camera	All channels
Video and Audio	IP Video Input	4-ch
	Incoming Bandwidth	40 Mbps
	Outgoing Bandwidth	80 Mbps
	HDMI Output	1-ch, 4K (3840×2160)/30 Hz, 2K (2560×1440)/60 Hz, 1920×1080/60 Hz, 1600×1200/60 Hz, 1280×1024/60 Hz, 1280×720/60 Hz
	VGA Output	1-ch, 1920×1080/60 Hz, 1280×1024/60 Hz, 1280×720/60 Hz
	Video Output Mode	HDMI1/VGA simultaneous output
	CVBS Output	N/A
	Audio Output	1-ch, RCA (Linear, 1 KΩ)
	Two-Way Audio	1-ch, RCA (2.0 Vp-p, 1 KΩ, using the audio input)
Decoding	Decoding Format	H.265/H.265+/H.264+/H.264
	Recording Resolution	12 MP/8 MP/6 MP/5 MP/4 MP/3 MP/1080p/UXGA/720p/VGA/4CIF/DCIF/2CIF/CIF/QCIF
	Synchronous Playback	4-ch

<b>Network</b>	Decoding Capability	AI on: 1-ch@8 MP (30 fps)/2-ch@4 MP (30 fps)/4-ch@1080p (30 fps) AI off: 1-ch@12 MP (30 fps)/2-ch@8 MP (30 fps)/4-ch@4 MP (30 fps)/8-ch@1080p (30 fps)
	Stream Type	Video, Video & Audio
	Audio Compression	G.711ulaw/G.711alaw/G.722/G.726/AAC
	Remote Connection	128
	API	ONVIF (profile S/G); SDK; ISAPI
	Compatible Browser	IE11, Chrome V57, Firefox V52, Safari V12, Edge V89, or above version
<b>Auxiliary Interface</b>	Network Protocol	TCP/IP, DHCP, IPv4, IPv6, DNS, DDNS, NTP, RTSP, SADP, SMTP, SNMP, NFS, iSCSI, ISUP, UPnP™, HTTP, HTTPS
	Network Interface	1 RJ-45 10/100/1000 Mbps self-adaptive Ethernet interface
	SATA	1 SATA interface
	Capacity	Up to 10 TB capacity for each HDD
<b>General</b>	USB Interface	Front panel: 1 × USB 2.0; Rear panel: 1 × USB 2.0
	Alarm In/Out	N/A (4/1 is optional)
	GUI Language	English, Russian, Bulgarian, Hungarian, Greek, German, Italian, Czech, Slovak, French, Polish, Dutch, Portuguese, Spanish, Romanian, Turkish, Japanese, Danish, Swedish Language, Norwegian, Finnish, Korean, Traditional Chinese, Thai, Estonian, Vietnamese, Croatian, Slovenian, Serbian, Latvian, Lithuanian, Uzbek, Kazakh, Arabic, Ukrainian, Kyrgyz, Brazilian Portuguese, Indonesian
	Power Supply	12 VDC, 1.5 A
<b>Certification</b>	Consumption	≤ 10 W (without HDD)
	Working Temperature	-10 °C to 55 °C (14 °F to 131 °F)
	Working Humidity	10% to 90%
	Dimension (W × D × H)	320 mm × 240 mm × 48 mm (12.6" × 9.4" × 1.9")
	Weight	≤ 1 kg (without HDD, 2.2 lb.)
	CE	EN 55032: 2015, EN 61000-3-2, EN 61000-3-3, EN 50130-4, EN 55035: 2017
	Obtained Certification	CE, FCC, IC, CB, KC, UL, RoHS, Reach, WEEE, RCM, UKCA, LOA, BIS

\*Note:

\*Alarm in/out can be optional for certain models. If you select a device model with "/Alarm4+1", then the device will have 4 alarm inputs and 1 alarm outputs.

## ▪ Function

### Smart Function

1-ch video analysis for human and vehicle recognition to reduce false alarm

Smart search for the selected area in the video, and smart playback to improve the playback efficiency

### Professional and Reliability

H.265+ compression effectively reduces the storage space by up to 75%

Adopt stream over TLS encryption technology which provides more secure stream transmission service  
HD Video Output

Provide simultaneous HDMI and VGA outputs

HDMI video output at up to 4K resolution

Storage and Playback

Up to 1 SATA interface for HDD connection (up to 10 TB)

4-ch synchronous playback


Network & Ethernet Access

1 self-adaptive 10/100 Mbps Ethernet interface

Hik-Connect for easy network management

## ▪ Physical Interface



No.	Description	No.	Description
1	LAN network interface	7	Power supply
2	AUDIO IN	8	Power switch
3	AUDIO OUT	9	GND
4	HDMI interface	10	ALARM IN
5	VGA interface	11	ALARM OUT
6	USB interface		

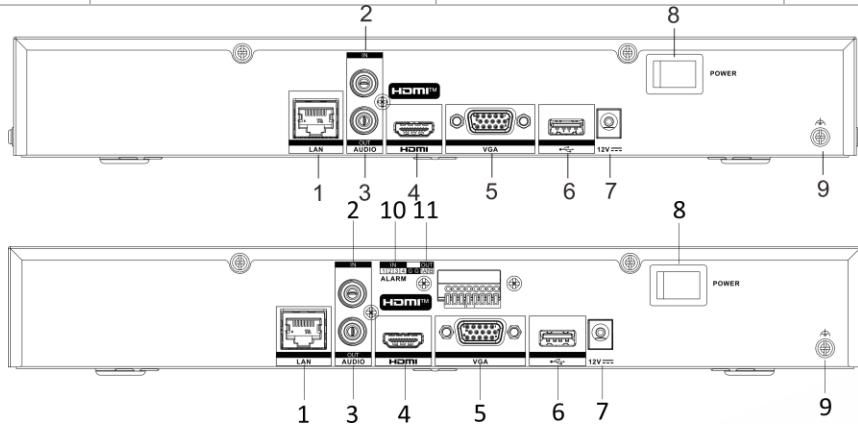




## ▪ Available Model

DS-7604NXI-K1/印度制造SKD

## ▪ Dimension

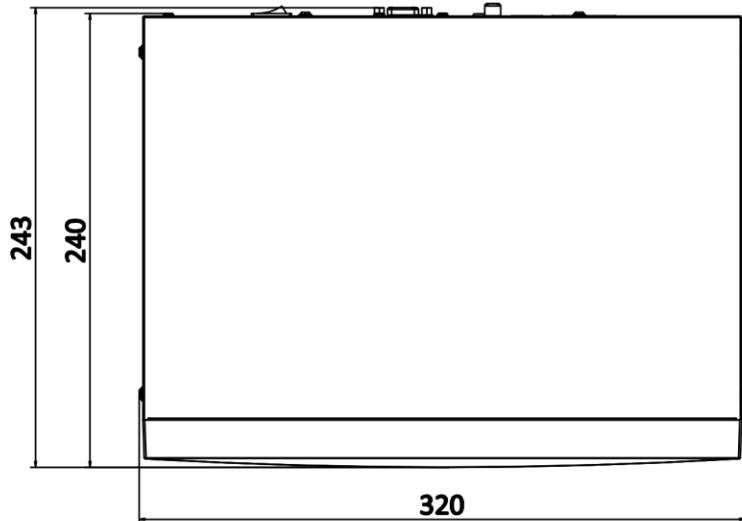

scale/1:1;Unit/mm

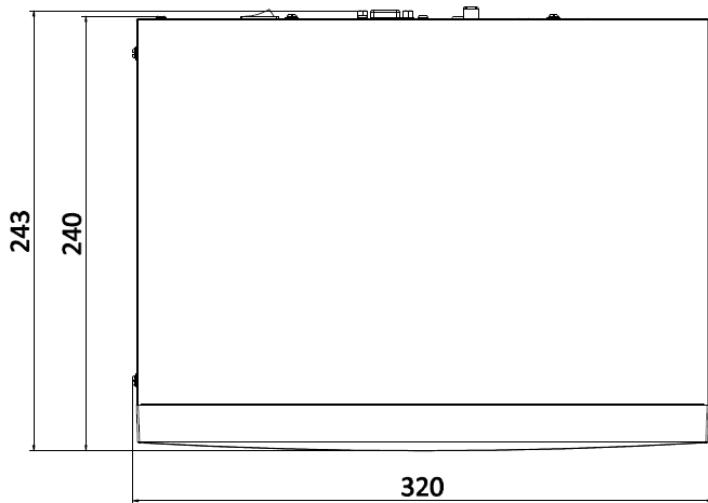

scale/1:1;Unit/mm

# See Far, Go Further



[www.hikvision.com](http://www.hikvision.com)  
[support@hikvision.com](mailto:support@hikvision.com)



© Hangzhou Hikvision Digital Technology Co., Ltd. Unless otherwise agreed, Hikvision makes no warranties, express or implied. We reserve the right to introduce modifications without notice.

**HIKVISION®**