

DTB-F7030 Flexible Anti-Metal Tag

Air Interface Protocol

EPC Global Class1 Gen2 ISO 18000-6C

Operational Frequency

(US Standard) 902-928 MHz

Tag Dimensions

70 * 30 * 1.2 mm

DTB
DO THE BEST

Shenzhen DTB RFID Co., Ltd.

www.dtbrfid.com sales@dtbrfid.com +86 755 2331 9797

10C/D,Block 3,Tingwei Business Park,#6 Liufang Road,Bao'an District,Shenzhen(518101)

Mechanical Parameters

Face Material	Bright PET
Liner Material	Glassine
Tag Pitch	37 mm
Reel Inner Diameter	76.2 mm
Tag Dimensions	70 * 30 * 1.2 mm


Electrical Parameters

Air Interface Protocol	EPC Global Class1 Gen2 ISO18000-6C
Frequency	(US Standard) 902-928 MHz
IC Type	Impinj M730
Memory	EPC 128 bits;TID 96 bits; User Memory:No
IC Life	100,000 Times
Data Retention	10 Years
Application Surface	Metal Surface
Reading Range	About 9 m (US Standard, Handheld 1W)


Other Parameters

Operating Temperature	-20°C～80°C
Storage Temperature	-30°C～100°C
Customized Option	Printing, Coding, Writing data, etc.
Certification	ROHS Certification


Structure Diagram

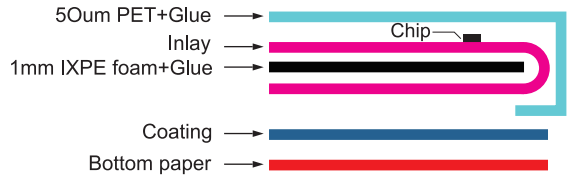


Read Range

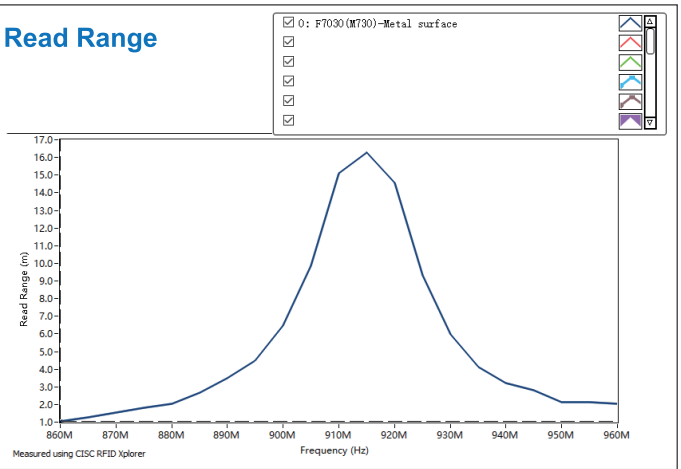

Sensitivity

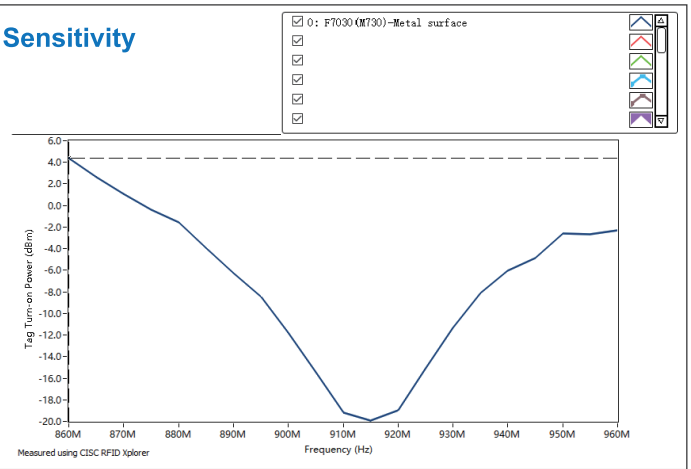

Unwinding Diagram

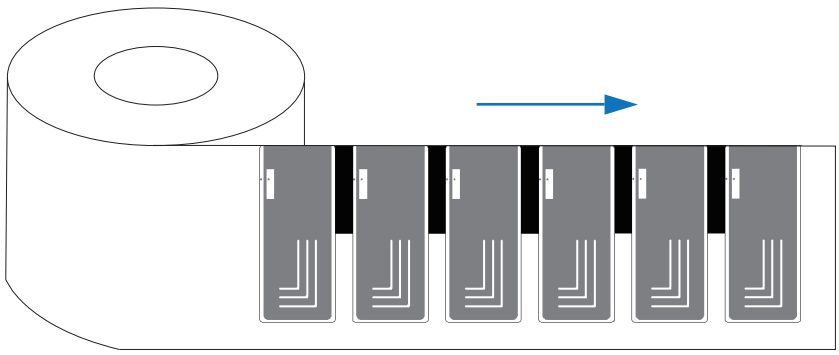

DO THE BEST

Shenzhen DTB RFID Co., Ltd.

www.dtbrfid.com sales@dtbrfid.com +86 755 2331 9797

10C/D,Block 3,Tingwei Business Park,#6 Liufang Road,Bao'an District,Shenzhen(518101)