


Scan Mobile World
Decode Creative Future





FULLY UPGRADED FUNCTIONS

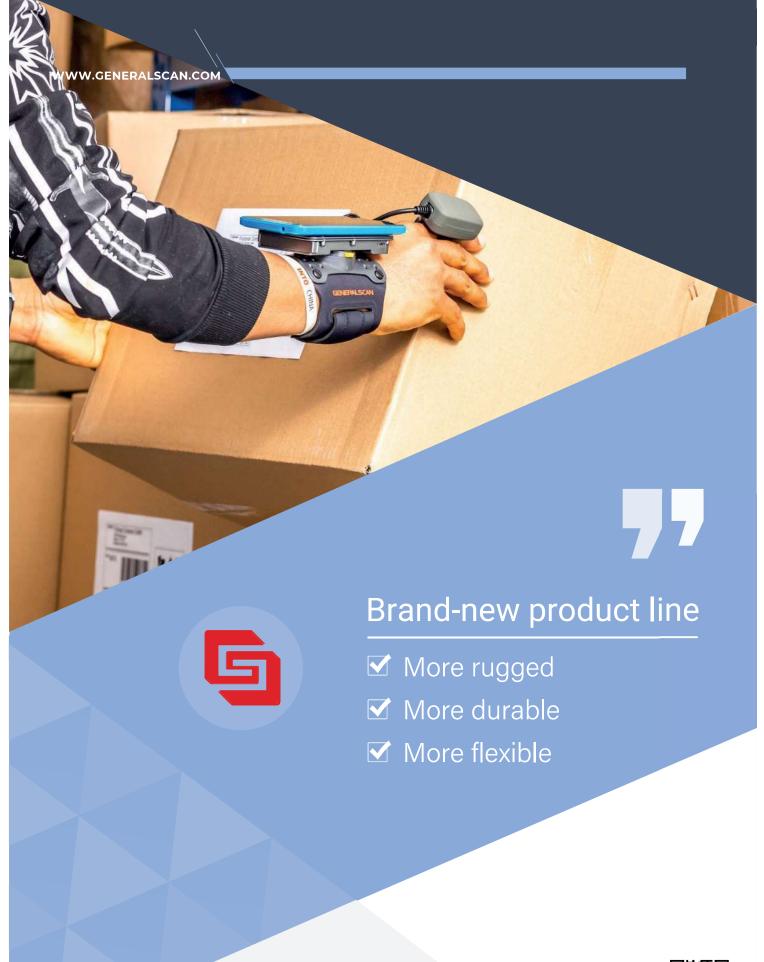







- ✓ Swappable Battery
- **☑** Swappable Trigger
- ✓ NFC
- ▼ TYPE-C



If you are looking for the best-in-class 1D scanner, fortunately, you have found it. GS R1120 is sturdily constructed with state-of-the-art 1D scanning performance and scanning range. Users can scan barcodes at the near contact and as far out as 15ft/4.5m (widest working range in this class).

Scanner Model	GS R1120	
Dimensions	74.8mm(L)×34.7mm(W)×25.3mm(D) 2.95in.(L)×1.37in.(W)×1.0in.(D)	
Weight	48g /1.69oz	
Sensor Technology	Laser	
Decode Range	Short Range	
Support Engine	Zebra EM1350	
Battery Capacity	400mAh&600mAh	
Working Hour	10.5-15h	



Learn More





GS R1521 Imager Short Range

GS R1521 is your best choice for a small, light-weight hands-free 2D wearable ring scanner which cost-effectively boosts productivity.

GS R1522 Imager Short Range

A compact, reliable, wearable scanner which supports reading poorly-printed and on-screen barcodes and can undertake highly intensive scanning workload.

	Swappa	able	Battery
--	--------	------	---------

✓ Swappable Trigger

✓ NFC

TYPE-C



Scanner Model	GS R1521	GS R1522
Dimensions	66.4mm(L)×34.7mm(W)×25.3mm(D) 2.62in.(L)×1.37in.(W)×1.0in.(D)	
Weight	44g /1.55oz 43g /1.52oz	
Sensor Technology	lmager	
Decode Range	Short Range	
Support Engine	K6000	Honeywell N4680
Battery Capacity	400mAh&600mAh	
Working Hour	10-14.5h	8-12h



Learn More






$\mathsf{GS}\;\mathsf{R3520}\;\mathsf{Imager}\;\mathsf{Middle}\mathsf{-Short}\;\mathsf{Range}$

GS R3520, a 2D wearable scanner provides a great user experience with enterprise-class durability, which enables high performance scanning on printed and mobile barcodes with intuitive illumination field and LED aimer,

GS R3521 Imager Middle-Short Range

GS R3521 is a trustworthy 2D wearable scanner with proven scanning performance due to high quality optical components, which perfectly balance scanning functionally and overall size.

Scanner Model	GS R3520	GS R3521
Dimensions	64.8mm(L)×34.5mm(W)×24.7mm(D) 2.56in.(L)×1.36in.(W)×0.97in.(D)	
Weight	43g /1.52oz	
Sensor Technology	lmager	
Decode Range	Middle-Short Range	
Support Engine	Zebra SE2707	Zebra SE4107
Battery Capacity	400mAh&600mAh	
Working Hour	9.6-14.3h	7.5-10.6h



✓ Swappable Trigger

▼ NFC

TYPE-C





Learn More





GS R5522 Imager Middle-Long Range

This provides unparalleled performance on any data imaginable-from 1D and 2D barcodes to photos and fully searchable and editable legal, letter, A4 and A5 documents. The working range is expanded to further than 20feet/6m.

GS R5523 Imager Middle-Long Range

This provides higher performance and reliability and enables increased barcode scanning speeds to meet higher-volume application requirements. It can read moving barcodes, enabling increased scanning speed and productivity.



earn More

GS R5520 Imager Middle-Long Range

This brings FASTER-THAN-EVER barcode capture, which captures virtually any 1D or 2D barcode in milliseconds from near contact to farther than 24in,/60 cm away. It has a wide field of view that allows easy close-up reading of large barcodes as well as multiple barcodes.

GS R5521 Imager Middle-Long Range

Allow workers to quickly capture barcodes whether the scanner or the barcode is in motion. It has extraordinary working range, which can capture barcodes farther than 24in./60cm away. It also can capture photos for proof of delivery and damage claims, as well as documents.



✓ Swappable Battery ✓ NFC

✓ Swappable Trigger ✓ TYPE-C

The most compact, most rugged design with enterprise-class durability.

Scanner Model	GS R5520	GS R5521	GS R5522	GS R5523
Dimensions	70mm(L)×36.4mm(W)×28.4mm(D) 2.76in.(L)×1.44in.(W)×1.12in)(D)			
Weight	65.68g/2.32oz			
Sensor Technology	Imager			
Decode Range	Middle-Long Range			
Support Engine	Zebra SE4710	Zebra SE4750MR	Zebra SE4770	Honeywell N6703
Battery Capacity	600mAh			
Working Hour	9.5h	9h	9h	12,5h

RUGLOVE



Make seamless workflows possible

- ✓ Applicable to every GS Ring Scanner
- $oldsymbol{arDelta}$ Operation with both hands
- ✓ Provides lightweight, ergonomic comfort and operational convenience
- ✓ Long trigger lifecycle
- ✓ Durable material resists wear
- ✓ Workers can share scanners with this dexterous glove





Battery Charger Applicable to every battery of GS Ring Scanner

Items	Parameters
Size	116mm × 46.54mm × 23mm 4,57in, × 1,83in, × 0,91in,
Weight	53g / 1.87oz
Charging time	400mAh 80 minutes 600mAh 100 minutes
Power indicator	Red LED on means power on
Charging indicator	Green LED on means charging, off means full, blinking means no battery
Interface	TYPE-C

☑ Adjustable cord being upgraded to metal wire







GS AB1800



GS AB2000



D100BT-PLUS

CONTACT US



GENERALSCAN

- Scan mobile world, decode creative future



sales@generalscan.cloud

CONTACT US

USA

Generalscan Inc. 200 Buckelew Ave, Jamesburg, NJ, 08831 +1 1469583-7367

GERMANY

Generalscan Electronics GmbH Heinrich-Koulen-Weg 3, 52525 Heinsberg Germany +49 24529892299

TURKEY

Generalscan Elektronik Limited Fatih Sultan Mehmet, 34771 Ümraniye/İstanbul Relux RSO 7th floor, 43

MEXICO

-Calzada de la Virgen #135-B Col. Avante. Del. Coyoacán, 04460 CDMX. México +52 55 6805 3384

CHINA

Generalscan Electronics Limited Room A605 ,6 Floor, Building 3, Ya Di Science Pork, He Tai Road, BaiYun District , Guangzhou , +86 020-31528412