


SR-590 provides sharp-edge print quality at low energy levels, and high print speeds of up to 10"/sec. It gives excellent print quality, especially on gloss papers and mirror-coated papers.

RECOMMENDED APPLICATION

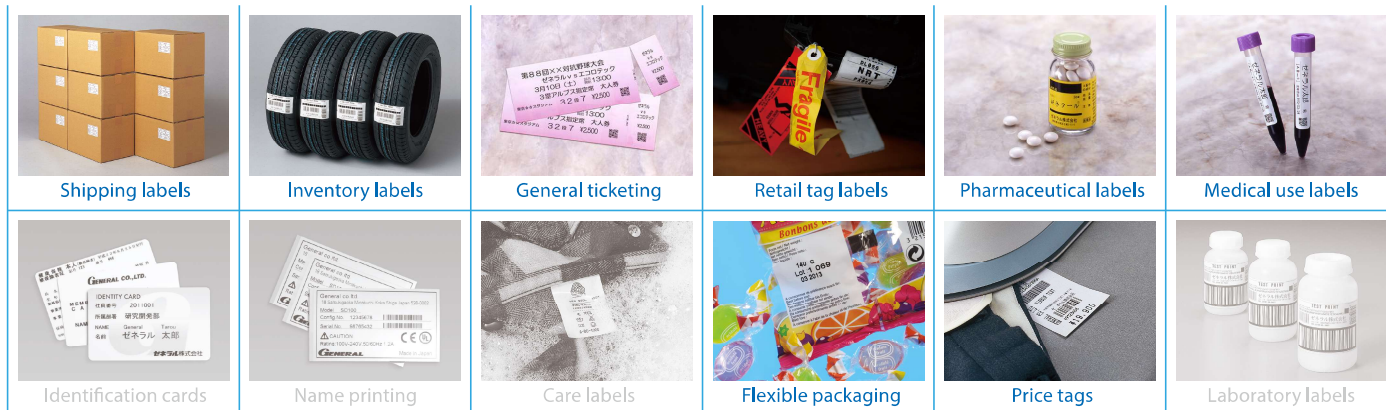

PRINT HEAD TYPE

FLAT EDGE

RECOMMENDED SUBSTRATES

Uncoated paper	★★★★
Coated paper	★★★★★
Gloss paper	★★★★★
Synthetic paper	★★★★★
Tag paper	★★★★★
Various types of film	★★★★
PET label	★★★★
Care label	—

RIBBON SPECIFICATION

Back coating	Silicon based
Film Thickness	4.5 ± 0.3μ
Ribbon Thickness	9.0 ± 0.5μ
Ink Type	WAX/RESIN
Ink Melting Point	80°C


TYPICAL COMPLIANCE

- REACH-SVHC Free : EU REACH Regulation(1907/2006) Substance of Very High Concern(SVHC)
- RoHS : RoHS Directive(2002/95/EC)Conformity
- Halogen Free : Chlorine Content : 900ppm or less Bromine Content : 900ppm or less Chlorine and Bromine Total Contents : 1500ppm or less
- TSCA : Premanufacture Notification(PMN) Conformity

GENERAL CO.,LTD. GENERAL Co., Ltd. Sales Department www.general.co.jp

Tokyo Head Office: 1-3-6 Nishikanda, Chiyoda-ku, Tokyo 101-0065 Phone: +81-3-5283-8640
 [China] Unit. C 3F, Zao-Fong Universe Building, No. 1800 Zhong Shan Xi Road, Shanghai, China Phone: +86 (0) 21 6440 1196
 [Malaysia] Lot 4298-4300 Sg. Choh Industrial Area 48000 Rawang, Selangor, Malaysia Phone: +60-3-6099-9000
 [India] No. 201 White Field, Plot 684685, 16th Road, KHAR (west), 400052, Mumbai, Maharashtra Phone: +91-91-6770-2315
 [USA] 22875 Savi Ranch Parkway, Unit G Yorba Linda CA 92887 Phone: +1 951 496 6678
 [Italy] Via Giacomo Leopardi, 29 20123 Milan Italy Phone: +39 2-4548-6203

SENSITIVITY

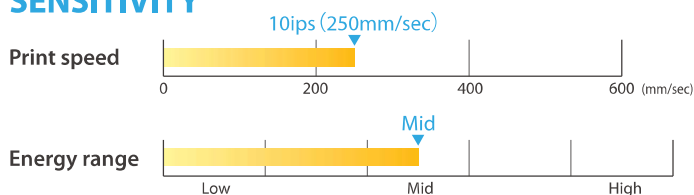

RESISTANCE

