




2017 Indirect Illumination



IDQ3 SERIES - Indirect Square Illumination

IDQ3 series provide even and diffuses illumination over a square area. The illumination is able to provide excellent illumination for square or rectangular objects.

Application: crack, chip, stains and mark on edge of square or rectangular object.

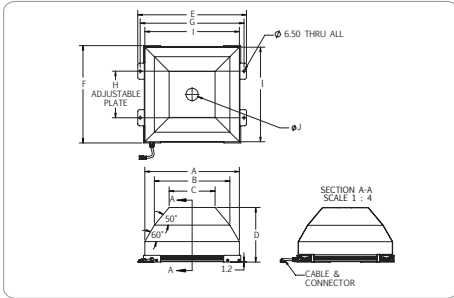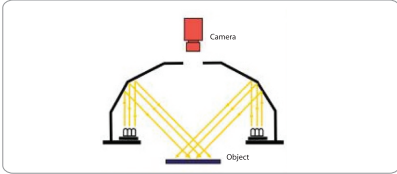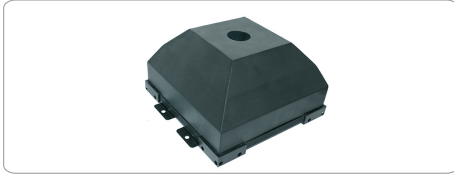

Technical Specification:

- Color Red, Green, Blue, White & RGB
- 24V DC Input Power
- Continuous and Strobe Applications
- Compact Size
- Lighting Cable 500mm

Customize Lighting:

- Customize Sizes, Mounting requirements
- Color and Voltage Available
- Consult Technical Sales for More Information

Model	Dimensions (MM)									Color	Voltage / Watt	Current	Weight (g)	
	A	B	C	D	E	F	G	H	I					Ø
IDQ3-00-120-X-X	210.0	169.6	110.9	126.2	240	218.0	226	74.0	138.2	35.0	●●●	24V / 17.28W	720mA	1420
IDQ3-00-190-X-X	270.0	215.7	131.1	156.0	300.2	278.0	286.2	134	198.0	35.0	●●●	24V / 25.92W	1080mA	1980
IDQ3-00-300-X-X	390.0	335.5	251.3	156.0	419.4	398.0	405.4	254.0	318.2	35.0	●●●	24V / 43.20W	1800mA	3000

Model	Dimensions (MM)									Color	Voltage / Watt	Current	Weight (g)	
	A	B	C	D	E	F	G	H	I					Ø
IDQ3-00-120-X-RGB	210.0	169.6	110.9	126.2	240	218.0	226	74.0	138.2	35.0	●●●	24V / 9.60W	400mA	1420
IDQ3-00-190-X-RGB	270.0	215.7	131.1	156.0	300.2	278.0	286.2	134	198.0	35.0	●●●	24V / 7.68W	320mA	1980
												24V / 7.68W	320mA	
												24V / 14.40W	600mA	
IDQ3-00-300-X-RGB	390.0	335.5	251.3	156.0	419.4	398.0	405.4	254.0	318.2	35.0	●●●	24V / 11.52W	480mA	3000
												24V / 11.52W	480mA	
												24V / 24.00W	1000mA	

Optional Connector

Standard Lighting Male Connector

PIN 1	24V
PIN 2	-
PIN 3	GND

M8 Male Connector

M8 Pin Assignment

PIN 1	-	-
PIN 2	RED	24V
PIN 3	-	-
PIN 4	BLACK	GND

M12 Male Connector

M12 Pin Assignment

PIN 1	BROWN	24V
PIN 2	WHITE	-
PIN 3	BLUE	GND
PIN 4	BLACK	-
PIN 5	GRAY	-

Product Part Numbering System :
IDQ3-00-120-X-X-24V-M8

Product Part Numbering System :
IDQ3-00-120-X-X-24V-M12