

# MV-ID2016M

## 1.6 MP Smart Code Reader



### Introduction

MV-ID2016M smart code reader can read different types of 1-dimensional and 2-dimensional codes, and its max. reading speed reaches 31 codes/sec (network device) and 29 codes/sec (USB device) respectively. It adopts deep learning algorithm to process images with good robustness, and can recognize various codes.

### Key Feature

- Built-in deep learning algorithm to read codes with good robustness.
- Compact design and small in size.
- Adopts aviation connector for single cable wiring.
- Adopts LED aiming light to help aim codes.
- Adopts focus knob for adjusting focusing manually.
- Adopts multiple IO interfaces and plug-in power interface.
- Supports multiple communication protocols, including TCP, Serial, FTP, Profinet, etc.


### Applicable Industry

Consumer electronics, food and beverage, pharmaceutical, semiconductor, new energy, etc.

### Available Model

- Red light source with network interface: MV-ID2016M-06S-RBN
- Blue light source with network interface: MV-ID2016M-06S-BBN
- White light source with network interface: MV-ID2016M-06S-WBN
- Red light source with USB interface: MV-ID2016M-06S-RBN-U
- Blue light source with USB interface: MV-ID2016M-06S-BBN-U
- White light source with USB interface: MV-ID2016M-06S-WBN-U

### Dimension

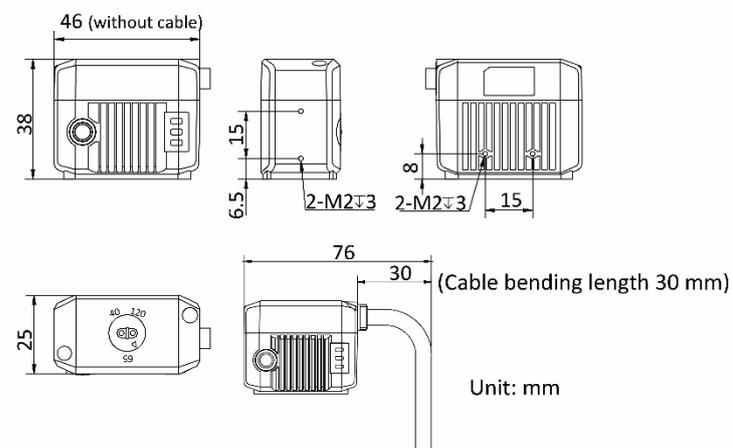

# Specification

Model	MV-ID2016M-06S-*BN	MV-ID2016M-06S-*BN-U
<b>Performance</b>		
<b>Symbologies</b>	1-dimensional codes: Code 39, Code 93, Code 128, ITF 14, ITF 25, CodaBar, EAN, UPCA, UPCE	
	2-dimensional codes: QR Code, Data Matrix	
<b>Max. frame rate</b>	60 fps	
<b>Max. reading speed</b>	31 codes/sec	29 codes/sec
<b>Sensor type</b>	CMOS, global shutter	
<b>Pixel size</b>	3.45 $\mu\text{m}$ $\times$ 3.45 $\mu\text{m}$	
<b>Sensor size</b>	1/2.9"	
<b>Resolution</b>	1408 $\times$ 1024	
<b>Exposure time</b>	16 $\mu\text{s}$ to 1 sec	
<b>Gain</b>	0 dB to 15 dB	
<b>Mono/color</b>	Mono	
<b>Communication protocol</b>	SmartSDK, TCP Client, Serial, FTP, HTTP, TCP Server, Profinet, MELSEC, Ethernet/IP, ModBus, UDP, Fins, SLMP	SmartSDK, USB
<b>Optics</b>		
<b>Focal length</b>	6 mm (0.2")	
<b>Working distance</b>	40 mm to 120 mm (1.6" to 4.7"), adjusting focus manually supported	
<b>Ambient illumination</b>	0 lux to 50000 lux	
<b>Light source</b>	Red LED, blue LED, white LED	
<b>Aiming system</b>	Green LED	
<b>Electrical feature</b>		
<b>Data interface</b>	Fast Ethernet	USB3.0
<b>Digital I/O</b>	17-pin M12 connector provides power and I/O, including configurable bi-directional non-isolated I/O $\times$ 4: input (Line 0/1) and output (Line 2/3) by default, RS-232 $\times$ 1. Device trigger via pressing button on side supported.	17-pin M12 connector provides data transmission. Device trigger via pressing button on side supported.
<b>Power supply</b>	12 VDC to 24 VDC	5 VDC (USB3.0 provides power supply)
<b>Max. power consumption</b>	Approx. 10.6 W@24 VDC	Approx. 4.6 W@5 VDC (USB3.0 provides power supply)
<b>Mechanical</b>		
<b>Indicator</b>	Power indicator (PWR), network indicator (LNK), and status indicator (STS).	
<b>Dimension</b>	46 mm $\times$ 38 mm $\times$ 25 mm (1.8" $\times$ 1.5" $\times$ 1.0")	
<b>Weight</b>	Approx. 160 g (0.35 lb.)	
<b>Ingress protection</b>	IP65	
<b>Temperature</b>	Working temperature: 0 $^{\circ}\text{C}$ to 50 $^{\circ}\text{C}$ (32 $^{\circ}\text{F}$ to 122 $^{\circ}\text{F}$ ), storage temperature: -30 $^{\circ}\text{C}$ to 70 $^{\circ}\text{C}$ (-22 $^{\circ}\text{F}$ to 158 $^{\circ}\text{F}$ )	
<b>Humidity</b>	20% to 95% RH, non-condensing	
<b>General</b>		
<b>Client software</b>	IDMVS	
<b>Certification</b>	CE, FCC, RoHS	

**HIKROBOT**

Hangzhou Hikrobot Co., Ltd.  
en.hikrobotics.com

© Hangzhou Hikrobot Co., Ltd. All Rights Reserved.

Hangzhou Hikrobot does not tolerate any infringement. Any organization or individual may not imitate or reproduce in whole or in part of the content. The data herein is based on Hikrobot's internal evaluation. Actual data may vary depending on specific configuration and operating condition. The information herein is subject to change without notice. All the content has been checked conscientiously. Nevertheless, Hikrobot shall not be liable to damages resulting from errors, inconsistencies or omissions.