

Pro330S



Compact and smart label printer

The OKI Pro330S label printer is the world's smallest*¹ LED toner color label printer, offering monochrome thermal customers the ability to create versatile and professional color labels and tags that maximize the effectiveness of their print advertising.

The Pro330S can quickly and easily print high-quality full-color labels and tags for a variety of productions, including gift certificates, coupons, value-added receipts, photo ID tags, visitor badges, price and promotional stickers, affixed labels, retail, ribbon or box-attached labels, and more to attract customer interest. With its compact size, the Pro330S can be used anywhere and is easy to transport. You can produce your own unique printed materials in a variety of ways, and your customers can take your products to a new level with their own various advertising campaigns on site.

Toner technology that provides print quality

No need for expensive priced inkjet media. Toner method does not bleed into water and offers strength in UV.

CMY tri-color integrated toner cartridge

Only one toner is needed to maintain inventory and speed production, simplifying warehousing; the three-color integrated toner can be easily replaced and the equipment can be used quickly without replacement delays.

Wired LAN and Wireless LAN

USB cables have always placed the printing PC in the vicinity, making space utilization difficult; OKI's Pro330S connects the Pro330S to the network via a wired LAN or optional wireless LAN, allowing easy printing on various PCs in the network.

Easy installation and printing

The Pro330S requires only the installation of a Windows driver to complete the basic environment for use on a PC. A variety of Windows programs, from general labels to variable data labels, allow you to design and print labels easily and quickly.

Colour/Black and White	✓
Width 25-86mm	✓
Length 53-551mm	✓
Print Speed Max. 152.4mm/S	✓
Media Recognition: Black marks, holes, notches, gaps, no marks	✓



Pro330S
Color Label Printer

Pro330S + Roll Paper Holder
Color Label Printer

*1 Standard for installation area for color LED/laser printers, based on our own research as of September 2021.

Pro330S | Color Label Printer

Label Printer	
Printing method	Digital 3 LED full color dry type (CMY)
Printing speed	Max. 152.4mm (6")/sec.
Time To First Print	5 sec; in standby (at Cold Start)*1
Warm-up time	23 seconds (when power is turned on)
Resolution	1200 x1200 dpi
Memory	512 MB
Toner cartridge	Integrated CMY tri-color toner cartridge

Interfaces and Software	
Connection	High-speed USB 2.0, 10Base-T/100Base-TX Ethernet (basic) IEEE802.11 b/ g/ n/ a wireless LAN (optional)
Printing Language	PCL6(XL), PCL5c
Networks & Protocols	TCP/ IPv4, TCP/ IPv6, NetBIOS over TCP, LPR, Port9100, IPP, FTP, HTTP, TELNET, SMTP, POP3, SNMPv1/ v3, DHCP, DHCPv6, DNS, DDNS, UPnP, WINS, Bonjour, SNMP, LLTD, WSD, SSL / TLS, IPsec, IEEE802.1X
OS Compatibility	Windows 8, 8.1, 10 Windows Server 2012, 2012 R2, 2016

Font Support	
Font Support	4 bitmap fonts 27 extended fonts

Printer Setup	
Display	Mono LCD; 16 Characters x2 Line
Environment	Operating temperature/humidity: 10°C to 32°C (recommended temperature: 17°C to 27°C)/20% to 80% RH (recommended humidity: 50% to 70% RH)
Power Supply	Single phase 220-240VAC, frequency 50/60Hz+/-2%.
Power Consumption	General: approx. 250 W, standby: 10 W, max: 650 W Power saving: approx. 5 W, sleep mode: approx. 1 W (depending on device settings).
Product size (HxWxD)	195x198x380mm
Product Weight	Approx. 9.5 kg
Printer Life	120km or 5 years

*1 Time until the edge of the paper comes out of the ejection port after the printing operation is started





*2 Available in selected countries only. Please check with your local dealer or contact OKI

Consumables usage guide: To protect the printer and to allow for left-transmission capability, this model was designed to work only with authentic OKI toner cartridges. These can be found at OKI's registered trademarks. If you are using other toner cartridges, even if they are listed as "compatible," they may not work at all, and even if they do possibly work, printer performance and print quality may be reduced.

Paper Management	
Width	25 - 86mm
Length	53 - 551mm
Thickness	0.08 - 0.25mm
Media Feeding	Rolled paper, folding, single sheet
Mark Type	Black marks (printed side, back), holes, notches, gaps, no marks
Cutter	Built-in rotary cutter (cutting length 53-551 mm)
Media Sensor	Transmissive sensor, Reflective sensor

Option	
Wireless LAN Module	Modules that connect wirelessly*2
Presenter Device	A device that allows the presenter device to be stopped at the mouth before the printed paper is completely ejected

Option – Roll Paper Holder (Roll Paper Feeding Guide)	
Media Type	Roll paper, die-cut label roll paper
Width	25 - 86mm
Roll Outer Diameter	Max. 203.2mm (8 inches)
Core Inner Diameter	50.8mm (2 inches) or 76.2mm (3 inches)
Roll Weight	Max. 2.4 kg
Printing Side	Outside the printing surface only (outer rolls)
Size (HxWxD)	232x175x311mm

Consumables		
Toner Cartridge*		3-color integrated (CMY): approx. 5,000 sheets
Image drum**		3-color one-piece type (CMY) about 25,000 sheets
Transfer belt**		Approx. 100,000 sheets
Fuser**		Approx. 100,000 sheets

* For a 25.4mm (1 inch) square black rectangle printed on 216mm x 58mm paper. Reference values based on our in-house testing.

** For printing only one sheet of 216mm x 58mm paper at a time. Reference values based on our in-house testing.


Option - Roll Paper Holder (Roll Paper Feeding Guide)



Okidata (Singapore) Pte Ltd
351 Braddell Road #03-01A
351 On Braddell
Singapore 579713
Tel: (65) 6221 3722
www.oki.com/sg/printing

Okidata (Singapore) Pte Ltd Malaysia Branch Office
Suite 21.03, 21st Floor,
Menara IGB, Mid Valley City,
59200 Kuala Lumpur, Malaysia
Tel: (03) 2287 1177
Tel: 1800 88 1177 (Toll Free)
Fax: (03) 2287 1166
www.oki.com/my/printing

Okidata Systems (Thailand) Ltd
1168/63 Lumpini Tower,
22nd Floor, Rama IV Road.,
Tungmahamek, Sathorn,
Bangkok, Thailand 10120
Tel: (662) 679 9235
Fax: (662) 679 9243, 45
www.oki.com/th/printing

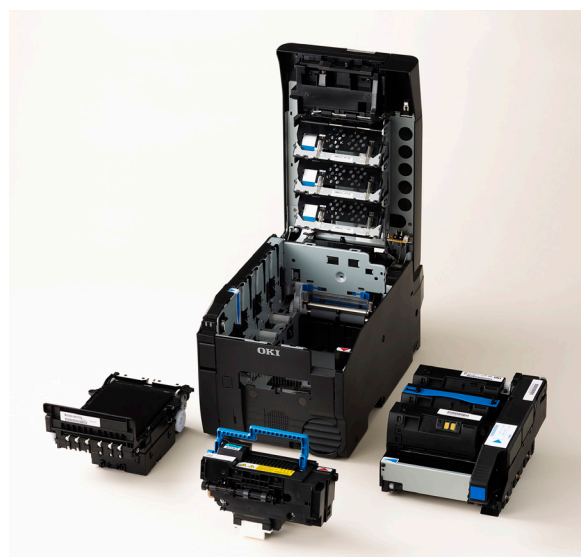

© Copyright 2022 OKI DATA (S) PTE LTD.
OKI DATA (S) PTE LTD is part of the Okidata Electric group of companies.
Specifications subject to change without notice. Version 1. 10/2022.

Windows, Windows8, Windows8.1, and Windows10 are either registered trademarks or trademarks of Microsoft Corporation in the United States and/or other countries.
All other product names and brand names are registered trademarks or trademarks of their respective companies.

OKI
Open up your dreams