
## RG-TET242

## Flap Barrier Turnstile



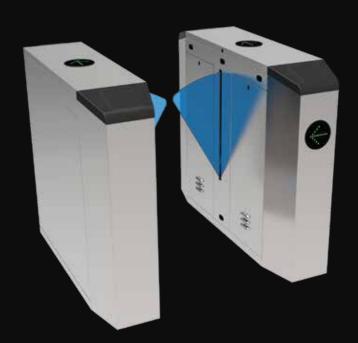

RG-TET242 is a direction indicator, showed that pederstrian access to the current status of, & guide pederstrains correct and smooth passage/

RG-TET242 utilize auto-reset function, if no passing during indentified card-reading time, the system will reset automatically the passengers are prohibited to pass until their second indentified reading.



With voice & strobe light alerts



Double anti-clipping function



Use Various type of cards & Bar code to achieve access



Can set delay closing in 1-60s

## **Technical Data**

Unit Model	RG-TQR148
Dimension	1200*280*980MM
Unlock Time	0.2s
Passage Width	≤550mm
Throughput Rate	35p/m
Power Supply	100~240V
Max Power Consump	35W
Accessible	IC/ID card, bar code & magnet cards
Motor Voltage	24V
Working Temperature	-25~70°C
Anti-clipping	Double ( Photocell & Mechanical )
Net Weight	45KG

## **Dimension(mm)**

