


## Durable Laser Barcode Scanner GS-6500



- **Dimensions**

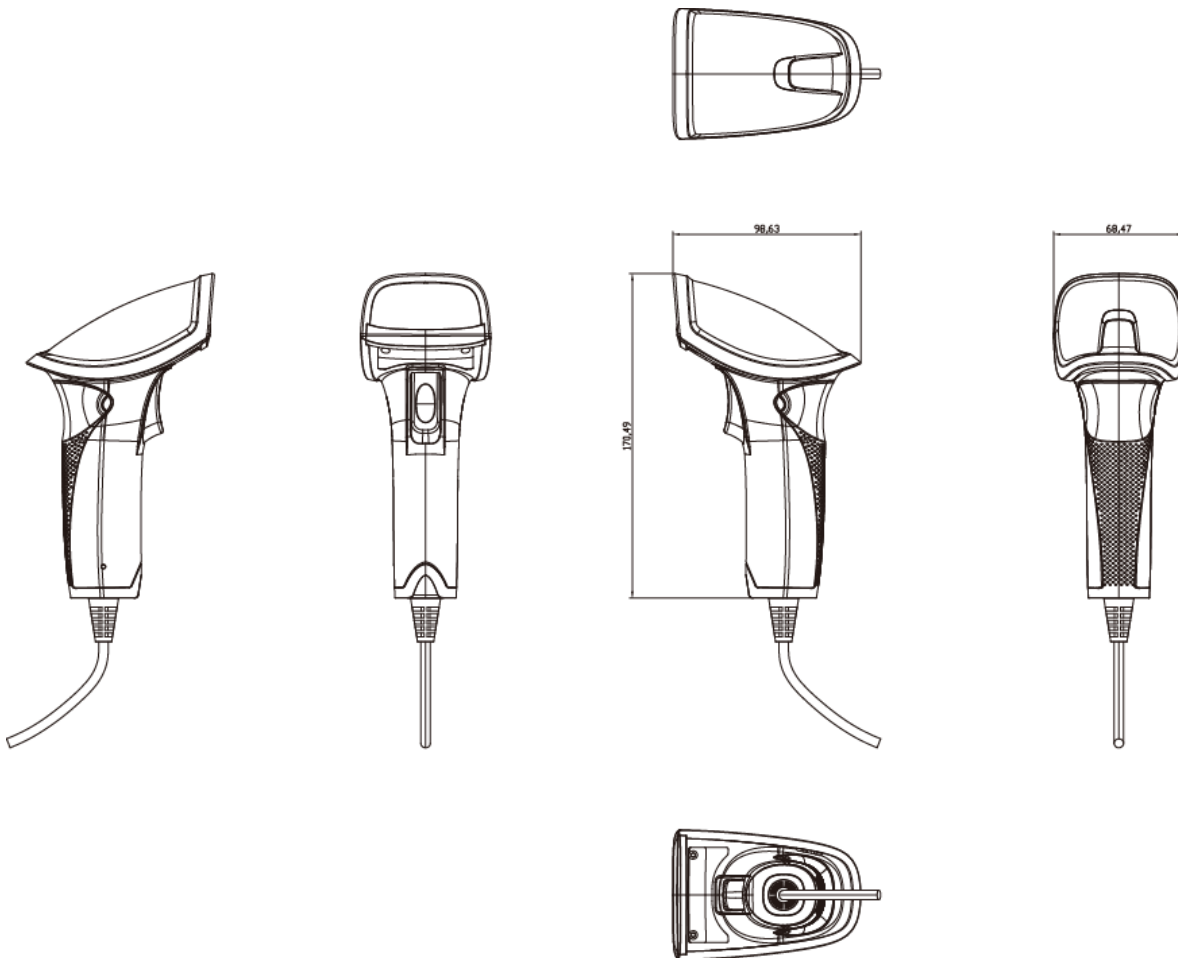

- Specifications**

<b>Model</b>		<b>GS-6500</b>
<b>General</b>		
Scan Rate		100 scans/sec
Sensor Type		Laser diode
Wavelength		650nm
Depth of Field		3~50 cm max
Contrast Ratio		>30%
Scan Patten		Single scan line
Resolution		0.1mm (4 mil) max.
System Interface		Keyboard Wedge / RS-232 / USB
Indicator		Buzzer and LED illumination
Readable Bar Code Symbologies		EAN-8, EAN-13, UPC-A, UPC-E, CODE-39, CODE-128, EAN-128, Codabar, Industrial 2/5, Interleave 2/5, Matrix 2/5, MSI, GS1
Auto Scan		Yes
Power Input		5VDC $\pm$ 5%
Operation Mode		85 mA (120mA max)
Power		5V DC via cable
Material		ABS
Color		Grey
Shock Resistance		1.5m drop onto concrete
Compliance		CE, FCC
Weight		approx. 242 g (with cable)
Dimension (L x W x H:mm)		170.5 x 68.5 x 90.6
Cable Length		180 cm, exchangeable
Ambient Light		Daylight, 5000 Lux
Operating Temperature		0°C~45°C
Storage Temperature		-20°C~ 60°C
Storage Humidity		5% -85% RH, non-condensing

