

# XP-P801A

Mobile Receipt Printer

Xprinter®



- Optional Color: **Black or White**



- Support missing paper **alarm** function




- Support **QR CODE**



- **70mm/s** print speed



- **1800mAh** battery

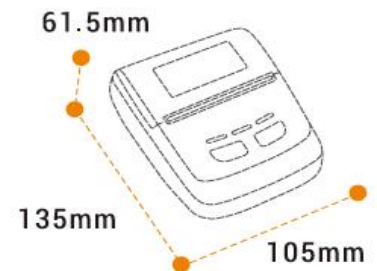

# XP-P801A

## Mobile Receipt Printer



<b>Model</b>	<b>XP-P801A</b>
<b>Printing method</b>	Direct thermal
<b>Resolution</b>	203 DPI
<b>Line spacing</b>	3.75mm (Adjustable by commands)
<b>Print width</b>	72 mm
<b>Max.print speed</b>	Max. 70 mm/s
<b>Media roll diameter</b>	Max. 50 mm
<b>Performance Features</b>	
<b>Interfaces</b>	USB+Bluetooth(1+1)
<b>Input buffer</b>	128 Kbytes
<b>NV Flash</b>	4M Kbytes
<b>Emulation</b>	ESC/POS
<b>Fonts/Graphics/Symbologies</b>	
<b>Character size</b>	ANK, Font A: 1.5×3.0mm (12×24 dots) Font B: 1.1×2.1mm (9×17 dots) simplified/traditional Chinese: 3.0×3.0mm (24×24 dots)
<b>Barcode types</b>	1D: UPC-A/UPC-E/JAN13(EAN13)/JAN8(EAN8)/CODE39/ITF/CODABAR/CODE93/ CODE128 2D: QR CODE
<b>Extended character sheet</b>	PC347(Standard Europe) / Katakana/ PC850(Multilingual) /PC860(Portuguese) / PC863(Canadian-French)/ PC865(Nordic) / West Europe/ Greek/ Hebrew/ East Europe/ Iran/ WPC1252/Pc866(Cyrillic#2) / PC852(Latin2)/ PC858/ IranII/ Latvian/ Arabic/ PT151(1251)
<b>Rotation</b>	0°、90°、180°、270°
<b>Physical characteristics</b>	
<b>Gross weight</b>	135*105*61.5mm (L*W*H)
<b>Dimensions</b>	0.3kg
<b>Printer head life</b>	50 KM
<b>Compatible systems</b>	
<b>Systems</b>	Windows/Android/iOS/Linux
<b>Power supply</b>	
<b>Battery</b>	7.4V/ 1800mAh
<b>Charging input</b>	DC 5V/2A
<b>Environmental Conditions</b>	
<b>Work environment</b>	0 ~ 45°C, 10 ~ 80%RH no condensing
<b>Storage environment</b>	-10 ~ 60 °C, ≤10~90% RH no condensing